

Bunkering Cart

Product Description

Bunkering carts are typically used dockside to deliver diesel and bunkers. The unit includes a positive displacement flowmeter with reset counter/totalizer, strainer with air release head, valve manifold, and dual hose reels. Units can be designed for flow rates from 25 to 420GPM, depending on flow meter and accessories selection. Registration available in US Gallons, Imperial Gallons, and Litres.

The unit is mounted on a hot-dipped galvanized steel trailer, dual axle, complete with DOT light package, leveling jacks, and heavy duty hitch..

The trailer is single axle, galvanized with retractable tongue, pneumatic tires, fenders, and (4) leveling jacks. DOT lights available as an option.

Our design is highly customizable. We can design and fabricate a unit to meet your exact requirements.

Typical Equipment Listing

- Smith Meter Double Case PD Meter
- Air Release / Strainer
- Veeder Root Reset Register / Totalizer
- Hannay 12V Power Rewind reel
- Hannay 1" Spring Rewind Hose Reel
- Ground Wire Reel with Clip
- 2" or 3" Heavy Duty Discharge Hose
- 1" Ø x 75Ft Green Marina Hose
- 2" or 3" 20Ft Suction Hose with MNPT Ends
- Inlet Butterfly Valve API607 Firetight Design
- Differential Pressure Gauge
- 2" or 3" 20Ft Suction Hose with MNPT Ends
- Kamvalok Dry Break Coupler Set
- Galvanized Trailer with Retractable Tongue
- Integral Drip Pan
- 12V Battery and charger
- Coupling Storage Locker

Optional Equipment

- Ticket Printer
- Register Swivel
- Fire Extinguisher
- Electronic Register
- Temperature Compensation
- Wireless Communication



SOLARES FLORIDA CORPORATION

7625 NW 54th Street


Miami, Florida 33166 USA

Telephone 305.592.0593

Facsimile 305.592.0400

Web Site www.solaresflorida.com



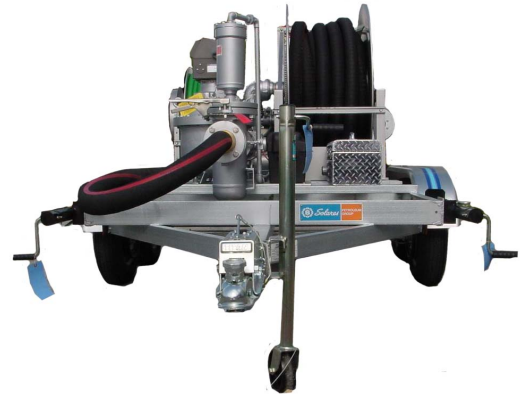

Specifications WorkSheet:

1. Single Or Dual Product

Product A

- a. Flow Rate (Min/Max)
- b. Pressure
- c. Temperature

Product B

- a. Flow Rate (Min/Max)
- b. Pressure
- c. Temperature

2. Single Or Dual Hose Reel

- a. Hose Size / Length A
- b. Hose Size / Length B

3. Unit of Registration

4. Nozzle / Coupling Type

Accessories:

- Temperature Compensation
 - Mechanical
 - Electronic
- EMR Electronic Register
- Mechanical Ticket Printer
 - Zero Start or Accumulative
- Preset
 - Mechanical
 - Digital
- Blending
 - Mechanical
 - Digital
- Fire Extinguisher
- Break-Away Safety Coupler
- Equipment Canvas Cover
- Wireless Data Transmission
- Other (Specify Below)

SOLARES FLORIDA CORPORATION

7625 NW 54th Street
 Miami, Florida 33166 USA
 Telephone 305.592.0593
 Facsimile 305.592.0400
 Web Site www.solaresflorida.com

